



8200-W

15 Amp Duplex Receptacle/Outlet, Hospital Grade, Self-Grounding

Duplex Receptacle Outlet, Extra Heavy-Duty Hospital Grade, Smooth Face, 15 Amp, 125 Volt, Back or Side Wire, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - White

Technical Information

AC Horsepower Ratings

Horsepower Rating : 1/2 HP

Electrical Specifications

Amperage : 15 A

Current Limiting : Full Rated Current

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Self-Grounding|Self-Grounding

Pole : 2

Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-2 per UL 94

Operating Temperature : -40° C to 60°C

Material Specifications

Body Material : Nylon

Clamp Nuts : Zinc-Plated Steel

Color : White

Face Material : Nylon

Ground Clips : Nickel-Plated Brass

Grounding Screw : Plated Brass

Line Contacts : Nickel-Plated Brass Triple-Wipe .040 Thick

Strap Material : Nickel Plated Brass|Nickel Plated Brass

Terminal Screws : Nickel-Plated Brass 10-32

Yoke : Nickel-Plated Brass

Mechanical Specifications

Product ID : Markings are permanently marked on device

Screw Terminal Torque : 14-18 in-lbs

Product Features

Color : White

Device Type : Duplex Receptacle Outlet


Color :  White

UPC Code : 078477818589

Country Of Origin : Please Contact Customer Service

NEMA :  5-15R

Available Colors :

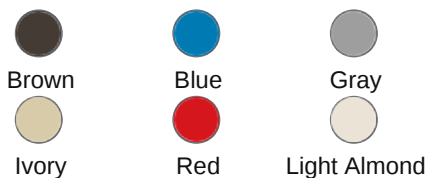

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Termination : Back or Side
Wire

Torque Range : 14-16 inch
pounds

Feature 4 : Smooth Face

Grade : Extra Heavy-Duty
Hospital Grade

Grounding : Self-
Grounding|Self-Grounding

NEMA : 5-15R

Strap Material : Nickel Plated
Brass|Nickel Plated Brass

Warranty : 10-Year Limited|10-
Year Limited

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File
152105

NEMA : WD-6

NOM : 057

RoHS : Compliant

UL Fed Spec WC-596 : File
E13399

UL498HG : File E13399

Warranty : 10-Year Limited|10-
Year Limited

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 ·

Visit our Website at: www.leviton.com

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2025 Leviton Manufacturing Co., Inc.