


## STAINLESS STEEL FOLDING SHELF



Supports instruments and test equipment used to install and maintain electrical components in an enclosure. Also ideally suited for supporting laptop computers, monitoring units and other equipment used with programmable controllers. The shelf can be installed on the inside or outside surface of larger nVent HOFFMAN industrial enclosures (except ProLine). Automatically locks in the horizontal position when raised. When not in use, the shelf folds down and projects only 1 in. (25 mm) from the mounting surface. Constructed of 304 stainless steel with a brushed finish. Maintains UL/CSA Type 4, 4X and 12 rating when properly installed on an nVent HOFFMAN enclosure.

### BULLETIN: A80

| Catalog Number | Size AxB<br>in./mm         | Maximum<br>Distributed<br>Load Rating (lb.) | Maximum<br>Distributed<br>Load Rating (kg) |
|----------------|----------------------------|---------------------------------------------|--------------------------------------------|
| ACSHELF1212SS  | 12.00 x 12.00<br>305 x 305 | 150                                         | 68                                         |
| ACSHELF1818SS  | 18.00 x 18.00<br>457 x 457 | 150                                         | 68                                         |
| ACSHELF2424SS  | 24.00 x 24.00<br>610 x 610 | 150                                         | 68                                         |

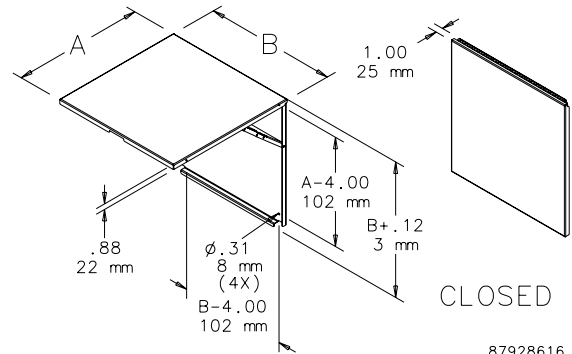

87928616


## LARGE FOLDING SHELF



Supports instruments and test equipment used to install and maintain electrical components in an enclosure. Also ideally suited for supporting laptop computers, monitoring units and other equipment used with programmable controllers. The shelf can be installed on the inside or outside surface of larger nVent HOFFMAN industrial enclosures (except ProLine). Automatically locks in the horizontal position when raised. When not in use, the shelf folds to 1.73 in. (44 mm) from the mounting surface. All parts are heavy

gauge steel. Maintains UL/CSA Type 4 and 12 when properly intalled on an nVent HOFFMAN enclosure.

| Catalog Number | Size AxB<br>in./mm         | Maximum<br>Distributed<br>Load Rating (lb.) | Maximum<br>Distributed<br>Load Rating (kg) | Finish     |
|----------------|----------------------------|---------------------------------------------|--------------------------------------------|------------|
| AASHLF1218     | 18.00 x 12.00<br>457 x 305 | 150                                         | 68                                         | White      |
| AA61SHLF1218   | 18.00 x 12.00<br>457 x 305 | 150                                         | 68                                         | Gray       |
| AA35SHLF1218   | 18.00 x 12.00<br>457 x 305 | 150                                         | 68                                         | Light gray |
| AASHLF1818     | 18.00 x 18.00<br>457 x 457 | 150                                         | 68                                         | White      |
| AA61SHLF1818   | 18.00 x 18.00<br>457 x 457 | 150                                         | 68                                         | Gray       |
| AA35SHLF1818   | 18.00 x 18.00<br>457 x 457 | 150                                         | 68                                         | Light gray |
| AASHLF2424     | 24.00 x 24.00<br>610 x 610 | 150                                         | 68                                         | White      |
| AA61SHLF2424   | 24.00 x 24.00<br>610 x 610 | 150                                         | 68                                         | Gray       |
| AA35SHLF2424   | 24.00 x 24.00<br>610 x 610 | 150                                         | 68                                         | Light gray |

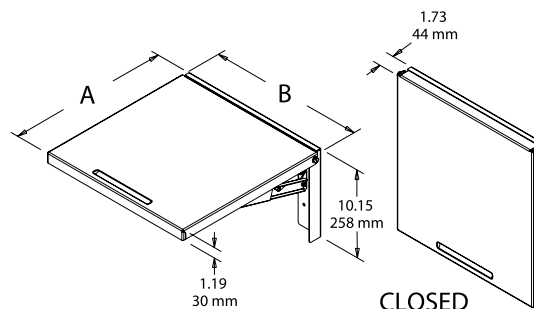


87928615

DOUBLE-SIDED SOLID ALUMINUM SHELF

Mounts on 19-in. open frame rack. Two shelves form double-sided shelf. Uses 4U rack space. Made of 0.090-in. thick aluminum with brushed finish.  
Maximum load rating: 100 lb. (45.4 kg) per side, 200 lb. (90.7 kg) total

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                    | Fits Rack | Includes  | Rack Units |
|----------------|----------------------------------------|-----------|-----------|------------|
| ESHDA19        | 5.62 x 19.31 x 9.37<br>143 x 490 x 238 | 19 in.    | 2 shelves | 4          |

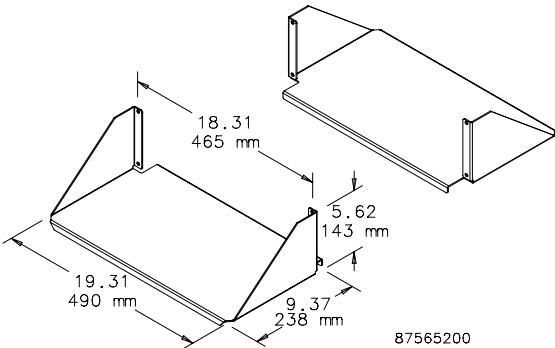


DOUBLE-SIDED, SOLID ALUMINUM, HEAVY DUTY SHELF

Mounts on open frame rack. Two shelves form double-sided shelf. Uses 4U rack space. Made of 0.090-in. thick aluminum with brushed finish.  
Maximum Load Rating: 150 lb. (68.0 kg) per side, 300 lb. (136.1 kg) total

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Includes  | Rack Units |
|----------------|-----------------------------------------|-----------|-----------|------------|
| ESHDHDA19      | 6.37 x 19.31 x 10.00<br>162 x 490 x 254 | 19 in.    | 2 shelves | 4          |

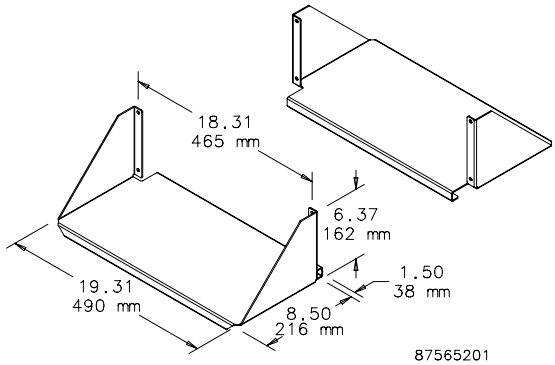


SINGLE-SIDED SOLID ALUMINUM SHELF

Mounts in a cabinet or on a 19-in. open-frame rack and can be wall mounted. Made of 0.090-in. thick aluminum with brushed finish.  
Maximum load rating: 100 lb. (45.4 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESHA19         | 5.25 x 18.31 x 15.00<br>133 x 465 x 381 | 19 in.    | 3          |

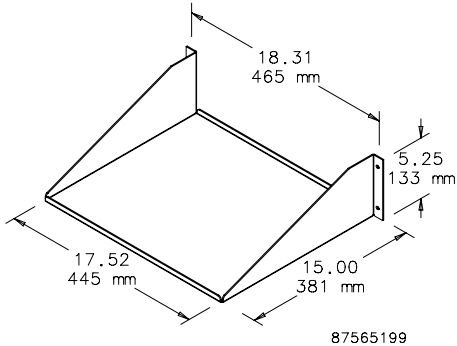


SINGLE-SIDED SOLID-STEEL SHELF

Solid shelf mounts to either front or rear flange of open-frame rack. Uses 3U of rack space. Steel with textured black finish.  
Load rating: 150 lb. (68.0 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESH19S         | 4.85 x 19.00 x 10.50<br>123 x 483 x 267 | 19 in.    | 3          |
| ESH23S         | 4.85 x 23.00 x 10.50<br>123 x 584 x 267 | 23 in.    | 3          |

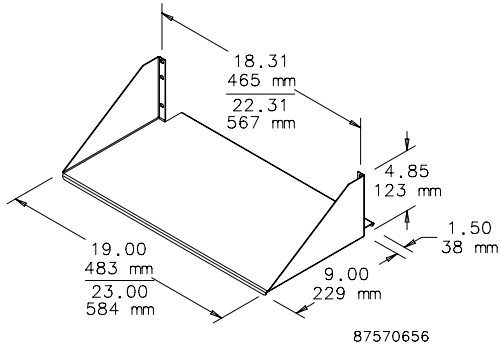


## SINGLE-SIDED STEEL VENTED SHELF

Vented shelf mounts to either front or rear flange of open-frame rack. Steel with textured black polyester powder paint finish. Load rating: 150 lb. (68.0 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESH19V         | 4.85 x 19.00 x 10.50<br>123 x 483 x 267 | 19 in.    | 3          |
| ESH23V         | 4.85 x 23.00 x 10.50<br>123 x 584 x 267 | 23 in.    | 3          |

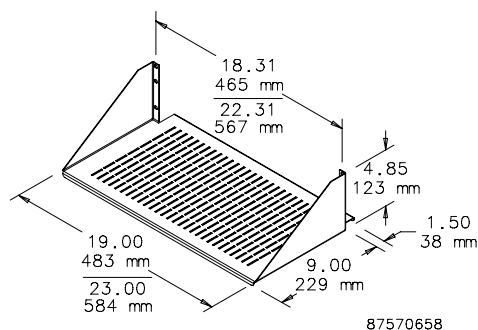


## DOUBLE-SIDED SOLID-STEEL SHELF

Solid double-deep shelf mounts to both front and rear flanges of open frame rack. Steel with textured black polyester powder paint finish. Load rating: 300 lb. (136.1 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESHD19         | 4.85 x 19.00 x 10.50<br>123 x 483 x 267 | 19 in.    | 3          |
| ESHD23         | 4.85 x 23.00 x 10.50<br>123 x 584 x 267 | 23 in.    | 3          |

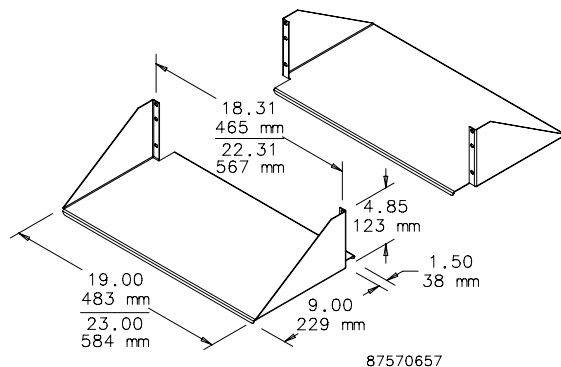


## DOUBLE-SIDED STEEL VENTED SHELF

Vented, double-deep shelf mounts to both front and rear flanges of open frame rack. Steel with textured black polyester powder paint finish. Load rating: 300 lb. (136.1 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESHDV19        | 4.85 x 19.00 x 10.50<br>123 x 483 x 267 | 19 in.    | 3          |
| ESHDV23        | 4.85 x 23.00 x 10.50<br>123 x 584 x 267 | 23 in.    | 3          |

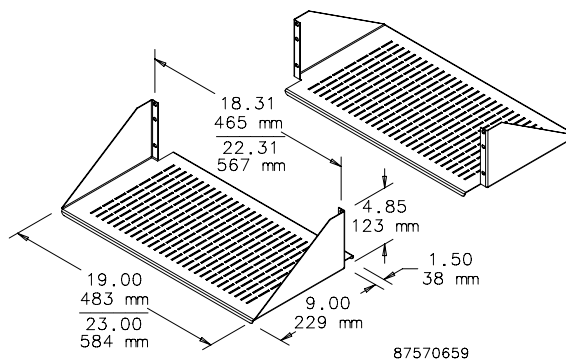


## CENTER-MOUNT STEEL SHELVES

19-in. shelf mounts to the front of the rack. Ideal for supporting monitors or computers. Designed to evenly distribute load across the rack. Manufactured from 16 gauge steel. Black, low-gloss, light-textured polyester powder paint finish on all surfaces. Load rating: 100 lb. (45.4 kg)

BULLETIN: DOFR

| Catalog Number | H x W x D<br>in./mm                    | Style  | Rack Units |
|----------------|----------------------------------------|--------|------------|
| ECMS1918       | 3.50 x 19.00 x 18.00<br>89 x 483 x 457 | Solid  | 2          |
| ECMS1922       | 3.50 x 19.00 x 22.00<br>89 x 483 x 559 | Solid  | 2          |
| ECMSV1918      | 3.50 x 19.00 x 18.00<br>89 x 483 x 457 | Vented | 2          |
| ECMSV1922      | 3.50 x 19.00 x 22.00<br>89 x 483 x 559 | Vented | 2          |

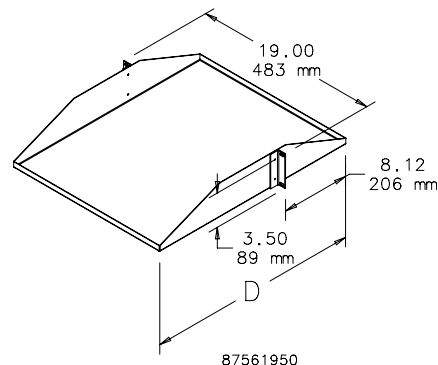


RACK-MOUNT STEEL SHELF

19-in. Rack-Mount Shelf mounts to the front of the rack. Ideal for holding non-19-in. rack-mount equipment. Available with or without vents. Manufactured from 16 gauge steel. Black, low-gloss, lightly-textured finish on all surfaces. Load rating: 100 lb. (45.4 kg)

BULLETIN: DOFRC

| Catalog Number | H x W x D<br>in./mm                     | Style  | Rack Units |
|----------------|-----------------------------------------|--------|------------|
| EMS1918        | 5.25 x 19.00 x 18.00<br>133 x 483 x 457 | Solid  | 3          |
| EMS1922        | 5.25 x 19.00 x 22.00<br>133 x 483 x 559 | Solid  | 3          |
| EMSV1918       | 5.25 x 19.00 x 18.00<br>133 x 483 x 457 | Vented | 3          |
| EMSV1922       | 5.25 x 19.00 x 22.00<br>133 x 483 x 559 | Vented | 3          |

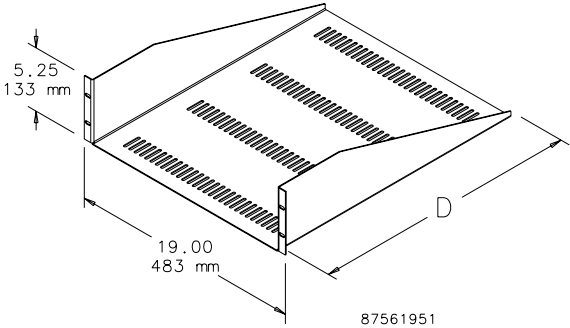


ADJUSTABLE STEEL VENTED SHELF

Vented shelf adjustable front to back in 25-mm increments. Shelf mounts to either front or rear flange of open frame rack. Steel with textured black polyester powder paint finish. Load rating: 60 lb. (27.2 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                    | Fits Rack | Rack Units |
|----------------|----------------------------------------|-----------|------------|
| ESHVA19        | 3.50 x 16.93 x 15.75<br>89 x 430 x 400 | 19 in.    | 2          |
| ESHVA23        | 3.50 x 19.93 x 15.75<br>89 x 506 x 400 | 23 in.    | 2          |

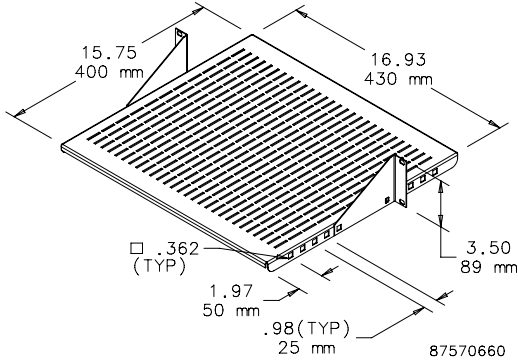


PULLOUT KEYBOARD TRAY WITH MONITOR SHELF

Mounts to the front and back surfaces of a standard 3-in. open frame rack. Fits full-size keyboard. Includes mouse tray. Extends 10.5 in. (267 mm) beyond front of open frame rack. Keyboard tray slides out an additional 7 in. (178 mm). Uses 4U rack space. 16 gauge steel with RAL 9005 black polyester powder paint finish. Monitor shelf load rating: 100 lb. (45.4 kg)

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| E19SKBM        | 7.00 x 19.90 x 10.24<br>178 x 505 x 260 | 19 in.    | 4          |

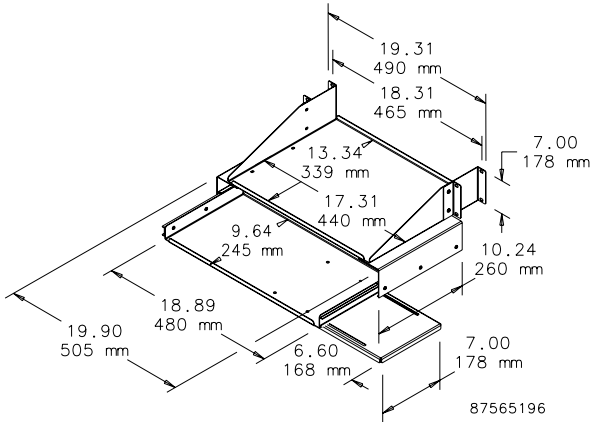


PULL-OUT SHELF FOR MINI KEYBOARD

Pull-Out Shelf for Mini Keyboard mounts either in a cabinet or on a 19-in. open-frame rack and fits a 16.25-in. (413-mm) wide keyboard. When closed, all parts slide between rack angles. Keyboard tray slides out 8.94 in. (227 mm). 16 gauge steel with RAL 9005 black polyester powder paint finish.

BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                    | Fits Rack | Rack Units |
|----------------|----------------------------------------|-----------|------------|
| P19KBSM        | 3.50 x 18.31 x 12.42<br>89 x 465 x 315 | 19 in.    | 2          |

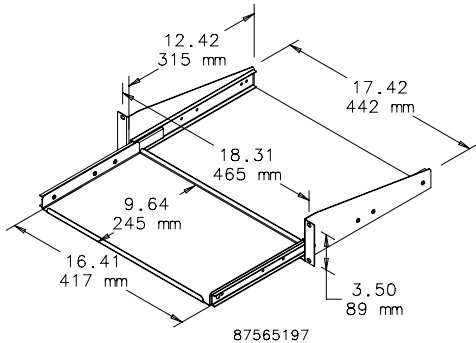


## PIVOTING KEYBOARD SHELF WITH MOUSE TRAY

Mounts either in a cabinet or on a 19-in. open-frame rack. Shelf pulls out and pivots 90 degrees to access full-size keyboard. Shelf allows keyboard to slide between standard rack angles and includes mouse tray. 16 gauge steel with RAL 9005 black polyester powder paint finish. Keyboard tray extends 9.75 in. (248 mm) beyond front of rack angles or open-frame rack.

### BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                    | Fits Rack | Rack Units |
|----------------|----------------------------------------|-----------|------------|
| P19KBPVT       | 3.50 x 18.89 x 19.25<br>89 x 480 x 489 | 19 in.    | 2          |

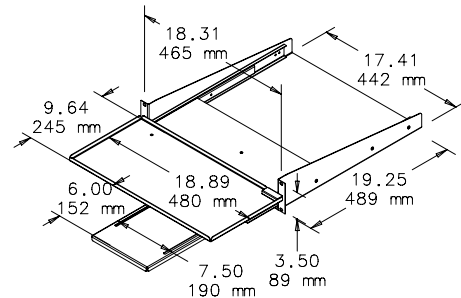


87565198

## STEEL KEYBOARD/MONITOR SHELF

Designed to accommodate a monitor and keyboard in an ergonomically engineered design. Shelf mounts to front flange of open-frame rack. Can mount in a cabinet if rack angles are adjusted back for door clearance. Uses 3U of rack space. 19-in. and 23-in. rack versions. Steel with textured black finish. Load rating: 200 lb. (91 kg)

### BULLETIN: DACCY

| Catalog Number | H x W x D<br>in./mm                     | Fits Rack | Rack Units |
|----------------|-----------------------------------------|-----------|------------|
| ESH19KBM       | 5.25 x 17.38 x 15.10<br>133 x 441 x 384 | 19        | 3          |
| ESH23KBM       | 5.25 x 21.38 x 15.10<br>133 x 543 x 384 | 23        | 3          |

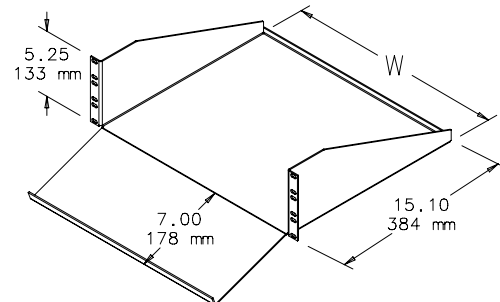

87570641

## TOOL-LESS SHELF




An easy-to-install tool-less vented 19-in. shelf. Mounts onto rack angles that have EIA-spaced square holes (.375 in.). Shelf slides open and provides a variable-sized, continuous surface for equipment. Back of shelf has oval cutouts for power and data cables. Accessory hole patterns at back of shelf fit small and large D-rings to help manage cable. Made of steel with a 150 lb. (68 kg) static load rating. Available with RAL 9005 black or RAL 7035 gray polyester powder coat finish.

**Note: For square-hole rack angles only!**

### BULLETIN: DACCY

| Catalog Number | Description                     | Finish | Minimum Depth<br>mm/in. | Maximum Depth<br>mm/in. | Rack Angle Type  |
|----------------|---------------------------------|--------|-------------------------|-------------------------|------------------|
| D19FVT69B      | Shelf, vented, 19 in. tool-less | Black  | 495<br>19.50            | 851<br>33.50            | Square hole only |
| D19FVT69G      | Shelf, vented, 19 in. tool-less | Gray   | 495<br>19.50            | 851<br>33.50            | Square hole only |
| D19FVT912B     | Shelf, vented, 19 in. tool-less | Black  | 792<br>31.20            | 1151<br>45.30           | Square hole only |
| D19FVT912G     | Shelf, vented, 19 in. tool-less | Gray   | 792<br>31.20            | 1151<br>45.30           | Square hole only |

Minimum and maximum depth measured from rack angle to rack angle.

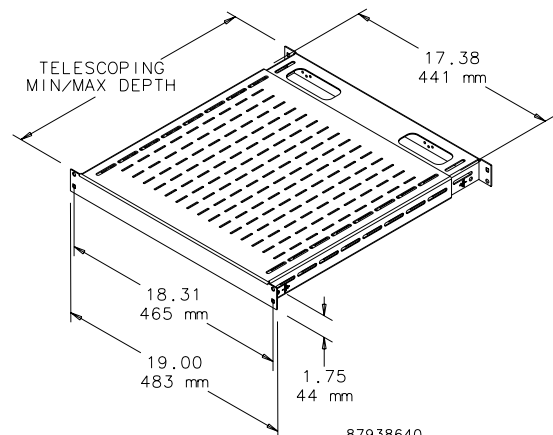


87938640

RACK-MOUNT ADJUSTABLE SHELF



Mounts to front surface of front and back rack angles. Shelf is made of painted 14 gauge steel and the adjustable support brackets are clear-plated 12 gauge steel. Adjustable to fit multiple-depth enclosures or rack angle placement. Both solid and vented models available. Fits 19- or 23-in. rack spacing. Requires only 1U of rack space. Shelf has RAL 7035 light-gray textured or RAL 9005 black textured polyester powder paint finish. Load rating: 150 lb. (68 kg)

BULLETIN: DACCY

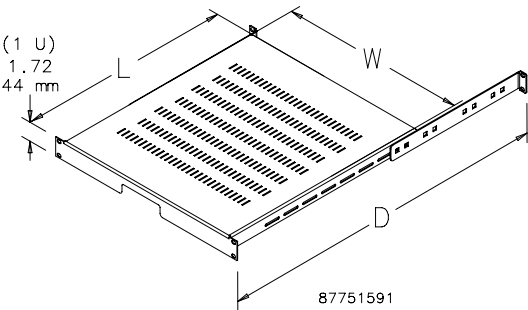

| Catalog Number | Type   | Size   | Finish | L x W (in.)   | L x W (mm) | Maximum Depth D (in.) | Maximum Depth D (mm) | Fits Enclosure Depth Up To (in.) | Fits Enclosure Depth Up To (mm) |
|----------------|--------|--------|--------|---------------|------------|-----------------------|----------------------|----------------------------------|---------------------------------|
| P19SH68        | Solid  | 19 in. | Gray   | 19.68 x 17.32 | 500 x 440  | 30.71                 | 780                  | 31.50                            | 800                             |
| P19SH68B       | Solid  | 19 in. | Black  | 19.68 x 17.32 | 500 x 440  | 30.71                 | 780                  | 31.50                            | 800                             |
| P19VSH68B      | Vented | 19 in. | Black  | 19.68 x 17.32 | 500 x 440  | 30.71                 | 780                  | 31.50                            | 800                             |
| P19SH810       | Solid  | 19 in. | Gray   | 27.56 x 17.32 | 700 x 440  | 38.58                 | 980                  | 39.37                            | 1000                            |
| P19SH810B      | Solid  | 19 in. | Black  | 27.56 x 17.32 | 700 x 440  | 38.58                 | 980                  | 39.37                            | 1000                            |
| P19VSH810B     | Vented | 19 in. | Black  | 27.56 x 17.32 | 700 x 440  | 38.58                 | 980                  | 39.37                            | 1000                            |
| P23SH68B       | Solid  | 23 in. | Black  | 19.68 x 21.32 | 500 x 542  | 30.71                 | 780                  | 31.50                            | 800                             |
| P23VSH68B      | Vented | 23 in. | Black  | 19.68 x 21.32 | 500 x 542  | 30.71                 | 780                  | 31.50                            | 800                             |
| P23SH810B      | Solid  | 23 in. | Black  | 27.56 x 21.32 | 700 x 542  | 38.58                 | 980                  | 39.37                            | 1000                            |
| P23VSH810B     | Vented | 23 in. | Black  | 27.56 x 21.32 | 700 x 542  | 38.58                 | 980                  | 39.37                            | 1000                            |


SINGLE-SIDED SHELF



Mounts to 19-in. rack angles to house voice/data networking equipment. RAL 9005 black finish. Load rating: 75 lb. (34 kg)

BULLETIN: DACCY


| Catalog Number | H x W x D (in.)      | H x W x D (mm) | Style  | Rack Units |
|----------------|----------------------|----------------|--------|------------|
| ESH198         | 3.74 x 19.00 x 8.00  | 95 x 483 x 203 | Solid  | 2          |
| ESH1915        | 3.74 x 19.00 x 15.00 | 95 x 483 x 381 | Solid  | 2          |
| ESH1915V       | 3.74 x 19.00 x 15.00 | 95 x 483 x 381 | Vented | 2          |
| ESH1917        | 3.74 x 19.00 x 17.00 | 95 x 483 x 432 | Solid  | 2          |

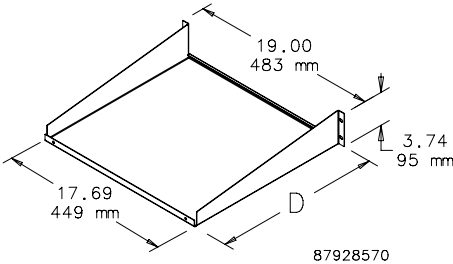

## RACK-MOUNT SLIDING SHELF

Rack-Mount Sliding Shelf mounts to front surface of front and back rack angles. Models fit 19- or 23-in. rack spacing. Adjusts to fit multiple-depth enclosures and rack angle placements. Shelf can be used on 2-post rack or cabinet with front rack angles only by reversing support bracket. Optional cable manager arm available. 14 gauge steel with 12 gauge supports and RAL 9005 black or RAL 7035 gray polyester powder paint finish. Load rating: 150 lb. (68.0 kg) with four corner mounting; 75 lb. (34.0 kg) with two-post or front-rack-angle cabinet mounting. Optional Cable Manager Arm is recommended to help control cable movement as shelf slides in and out.

**BULLETIN: DACCY, P20**

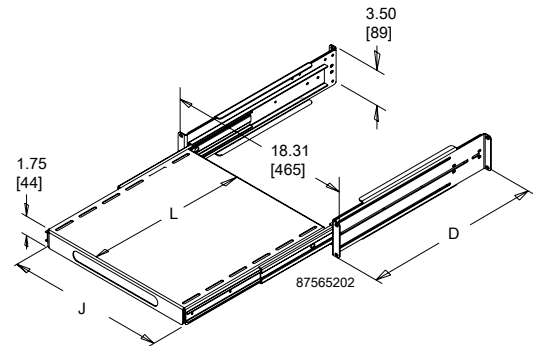


| Catalog Number | D Max. (in.) | D Max. (mm) | L (in.) | L (mm) | J (in.) | J (mm) | Shelf Pullout (in.) | Shelf Pullout (mm) | Fits Rack | Rack Units | Color |
|----------------|--------------|-------------|---------|--------|---------|--------|---------------------|--------------------|-----------|------------|-------|
| P19SHP68B      | 37.40        | 950         | 16.72   | 425    | 16.20   | 412    | 17.00               | 432                | 19 in.    | 2          | Black |
| P19SHP68       | 37.40        | 950         | 16.72   | 425    | 16.20   | 412    | 17.00               | 432                | 19 in.    | 2          | Gray  |
| P19SHP810B     | 41.30        | 1050        | 24.59   | 625    | 16.20   | 412    | 17.00               | 432                | 19 in.    | 2          | Black |
| P19SHP810      | 41.30        | 1050        | 24.59   | 625    | 16.20   | 412    | 17.00               | 432                | 19 in.    | 2          | Gray  |
| P23SHP68B      | 37.40        | 950         | 16.72   | 425    | 20.20   | 513    | 17.00               | 432                | 23 in.    | 2          | Black |
| P23SHP68       | 37.40        | 950         | 16.72   | 425    | 20.20   | 513    | 17.00               | 432                | 23 in.    | 2          | Gray  |
| P23SHP810B     | 41.30        | 1050        | 24.59   | 625    | 20.20   | 513    | 17.00               | 432                | 23 in.    | 2          | Black |
| P23SHP810      | 41.30        | 1050        | 24.59   | 625    | 20.20   | 513    | 17.00               | 432                | 23 in.    | 2          | Gray  |

## CABLE MANAGER ARM FOR SLIDING EQUIPMENT SHELF

Cable Manager Arm mounts to back of sliding equipment shelf on right or left side. Controls cable movement as shelf slides in and out. 14 gauge steel with RAL 9005 black polyester powder paint finish.

**BULLETIN: DACCY**

| Catalog Number | Description       | Use With                |
|----------------|-------------------|-------------------------|
| PHCB           | Cable Manager Arm | Sliding Equipment Shelf |

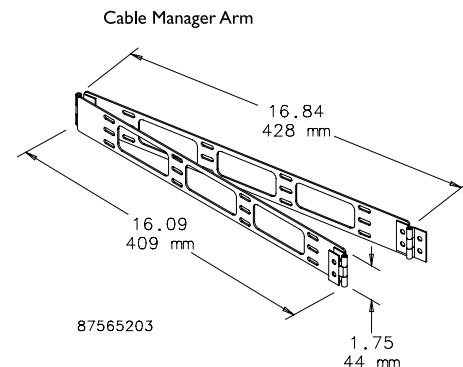


## KEYBOARD COMPARTMENT FOR 19-IN. RACKS



Provides a convenient way to incorporate a keyboard with other 19-in. rack-mounted equipment. Uses 2 RU of space. Made of lightweight aluminum with brushed finish. Accommodates keyboard up to 16.50-in. (419-mm) wide. Mounting hardware included.

**BULLETIN: DACCY**

| Catalog Number | Fits rack width | Rack Units |
|----------------|-----------------|------------|
| A19KBC2B       | 19              | 2          |

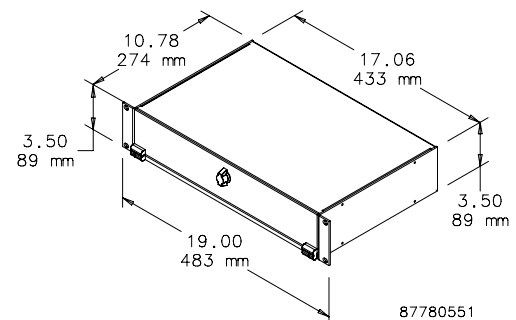


RACK-ANGLE MOUNTED DRAWER



Steel drawer for 19-in. rack-angle mounting. Mounts to the front surface of the rack angles. Integral steel box contains the drawer and protects surrounding internal equipment. Extends 13 in. (330 mm) on ball bearing slides. Front includes handle and key lock. Finish is RAL 7035 textured light-gray polyester powder paint. Mounting hardware is included.

BULLETIN: P20

| Catalog Number | H (mm) | H (in.) | Fits Rack Width | Rack Units |
|----------------|--------|---------|-----------------|------------|
| P19DR1US       | 43     | 1.69    | 19 in.          | 1          |
| P19DR2US       | 88     | 3.47    | 19 in.          | 2          |
| P19DR3US       | 132    | 5.20    | 19 in.          | 3          |

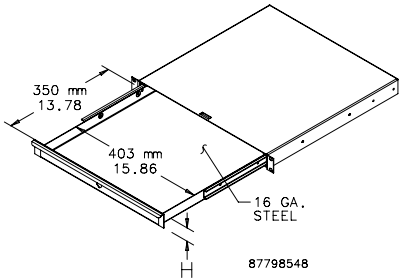


WRITING SURFACE FOR RACK-ANGLE-MOUNTED DRAWER



Steel cover mounts on top of the drawer and serves as a writing surface and drawer cover. Finish is RAL 7035 light-gray textured polyester powder paint. Drawer shown in illustration and photo must be ordered separately.

BULLETIN: P20

| Catalog Number | Description                     | Fits                      |
|----------------|---------------------------------|---------------------------|
| P19WS          | Steel writing surface and cover | Drawer (order separately) |

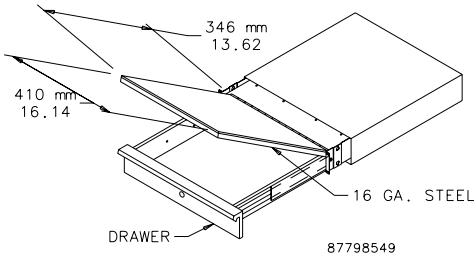


19-IN. FIXED SHELF



14 gauge steel fixed shelf has large ventilation slots in shelf surface. Mounts between two pair of rack mounting angles that have accessory mounting legs. Shelves have RAL 7035 light-gray polyester powder paint finish. Plated mounting hardware is furnished.

BULLETIN: P20

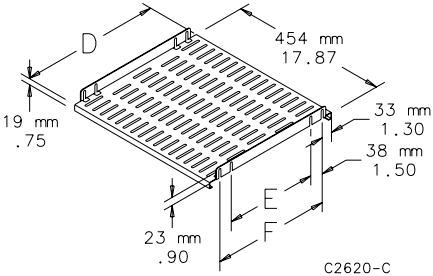

| Catalog Number | D (in.) | D (mm) | E (in.) | E (mm) | F (in.) | F (mm) | Fits Rack Width |
|----------------|---------|--------|---------|--------|---------|--------|-----------------|
| A19SH5         | 16.06   | 408    | 10.46   | 266    | 13.46   | 342    | 19 (in.)        |
| A19SH6         | 20.00   | 508    | 14.40   | 366    | 17.40   | 442    | 19 (in.)        |
| A19SH8         | 27.87   | 708    | 22.27   | 566    | 25.27   | 642    | 19 (in.)        |

**CONCEPT KEYBOARD BOX**




Keyboard box is designed to fit on an outside surface of an enclosure to provide a self-contained external Type 4 housing for a keyboard. The box attaches to the enclosure surface with 4 bolts. A large hole and rubber plug are provided for keyboard cord and plug. The hinged cover is supported with flexible cables in the open position. A left and a right mouse tray slides out from under the keyboard mounting surface. VELCRO® strips with pressure-sensitive adhesive are supplied to attach a keyboard. An internal mouse storage pracket is provided. The box and cover are 16 gauge steel with ANSI 61 gray polyester powder paint finish. Cover latches with a single quarter-turn slotted latch. Optional Concept latches also fit. *VELCRO is a trademark of Velcro Industries B.V.*

**BULLETIN: A80**

| Catalog Number | AxBxC in./mm         | Max. Keyboard Size<br>W x D x H<br>in./mm |
|----------------|----------------------|-------------------------------------------|
| CKBC24         | 10.00 x 23.30 x 4.79 | 20.20 x 8.00 x 2.34                       |
|                | 254 x 592 x 122      | 513 x 203 x 59                            |

12 GAUGE GLAND PLATE, TYPE 4 AND TYPE 12

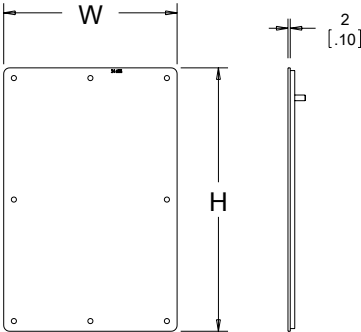

89083184

Mild steel gland plates are constructed of 12 gauge steel and finished with ANSI 61 gray polyester powder paint. Gland plates provide a removable cable egress and entry plate while maintaining enclosure rating of UL Type 4 and Type 12. Easy installation by cutting a rectangular opening in the enclosure and fastening with included hardware kit.

BULLETIN: GP1

| Catalog Number | Cutout Size (in.) | Cutout Size (mm) | W x H (in.)  | W x H (mm) |
|----------------|-------------------|------------------|--------------|------------|
| GP126          | 9.50 x 3.75       | 241 x 95         | 10.98 x 5.23 | 279 x 133  |
| GP128          | 9.50 x 5.75       | 241 x 146        | 10.98 x 7.23 | 279 x 184  |
| GP166          | 13.50 x 3.75      | 343 x 95         | 14.98 x 5.23 | 380 x 133  |
| GP168          | 13.50 x 5.75      | 343 x 146        | 14.98 x 7.23 | 380 x 184  |
| GP206          | 17.50 x 3.75      | 446 x 95         | 18.98 x 5.23 | 482 x 133  |
| GP208          | 17.50 x 5.75      | 446 x 146        | 18.98 x 7.23 | 482 x 184  |
| GP248          | 21.50 x 5.75      | 546 x 146        | 22.98 x 7.23 | 584 x 184  |
| GP2412         | 21.50 x 7.00      | 546 x 178        | 22.98 x 8.48 | 584 x 215  |


16 GAUGE GLAND PLATE



Constructed of 16 gauge steel. Gland plates will maintain UL/CSA Type 12 integrity while providing a removable cable egress and entry plate. Easily installed by cutting a rectangular opening in the enclosure. Finish is ANSI 61 gray polyester powder paint.

BULLETIN: GP1

| Catalog Number | K in./mm     | L in./mm     |
|----------------|--------------|--------------|
| DLGP610        | 9.00<br>229  | 9.94<br>252  |
| DLGP618        | 17.00<br>432 | 17.94<br>457 |

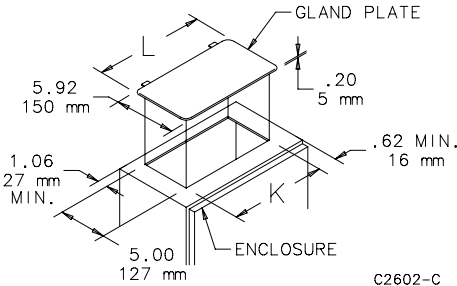

12 GAUGE GLAND PLATE



Constructed of 12 gauge steel and designed for use with 10 gauge and 12 gauge enclosures. Provides a removable cable egress and entry plate while maintaining UL/NEMA integrity of the enclosure. Gasket with pressure-sensitive adhesive is included to be applied after desired modifications are completed. Finish is ANSI 61 gray polyester powder paint. Maintains UL/NEMA Type 4 and Type 12 if properly installed in an nVent HOFFMAN enclosure.

BULLETIN: GP1

| Catalog Number | Size in./mm                | Opening Size in./mm        |
|----------------|----------------------------|----------------------------|
| AGP618         | 6.50 x 18.50<br>165 x 470  | 4.00 x 16.00<br>102 x 406  |
| AGP1218        | 12.50 x 18.50<br>318 x 470 | 10.00 x 16.00<br>254 x 406 |
| AGP1618        | 16.50 x 18.50<br>419 x 470 | 14.00 x 16.00<br>356 x 406 |