

Industry-Leading Ground-Fault Protection.



SmartlockPro® Self-Test GFCIs. Protection You Can Trust.

Industry-leading quality, professional grade lockout action, and the slimmest profile on the market make SmartlockPro Self-Test GFCIs a smart choice in ground-fault circuit interrupter protection. Engineered to meet the latest UL standard for auto-monitoring (self-test), our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that protected power is available. If the GFCI detects a problem, one or more of the following will occur:

- Power will be denied (trip with the inability to reset)
- Trip with the ability to reset, subject to the next auto-monitoring test cycle or repeatedly trip
- Visual and/or audible indication

Faster and easier to install in any wallbox because the depth is reduced, our slim Self-Test GFCIs flush mount to the wall with minimal protrusion for a sleek, finished look.

Applications

Residential - Kitchens, bathrooms, garages, basements, laundry rooms, wet sink and other wet locations around the home

Educational Facilities - Classrooms, restrooms, laboratories, dormitories and kitchens

Airports - Public bathrooms, general use and maintenance areas


Restaurants, Lodging and Retail Malls - Public bathrooms, general use and maintenance areas

Commercial Offices - Bathrooms, basement areas, hallways and kitchen facilities

Public Areas - Wherever receptacles are located near wet or damp locations



Features and Benefits

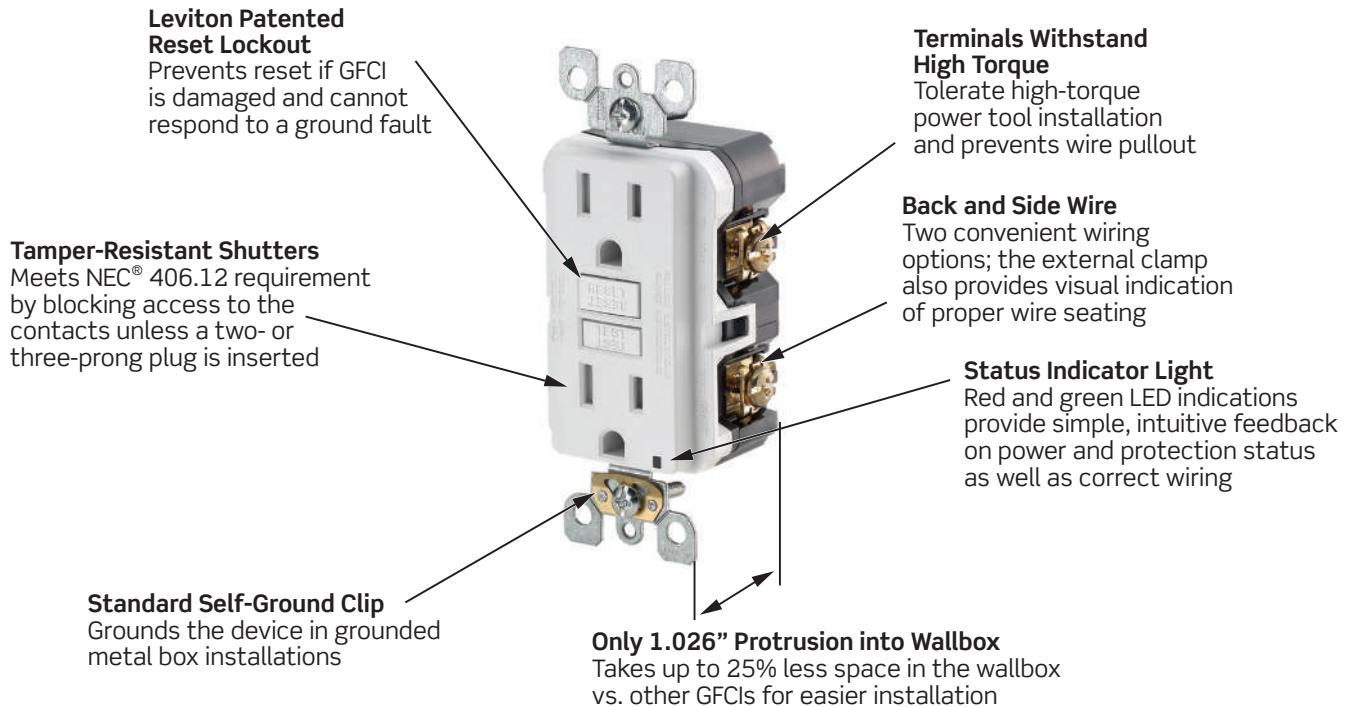

Self-Test

- Provides continuous ground-fault protection - detects and trips on actual ground-fault even when self-test is being conducted
- On initial power up, tests the GFCI within 3 seconds
- Auto-monitoring exceeds the UL requirement
- Auto adapts and shifts to more frequent testing if potential problem is detected
- Testing frequency regularly updates protection status
- Electronics are designed to minimize any false triggers

General Features

- Patented bridge contact provides individual sets of contacts for GFCI receptacle face and downstream receptacles; no power will be delivered to receptacle face if improperly wired (line-load reversed)
- Trip threshold meets or exceeds UL requirements for tripping time
- Improved immunity to high frequency noise reduces nuisance tripping
- Advanced electronics provides superior resistance to electrical surges and over-voltages
- Patented Lockout Action prevents reset if GFCI is damaged and cannot respond to a ground-fault
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal
- Silver alloy contacts
- Impact-resistant thermoplastic cover and body
- One-piece T-design trip latch mechanism provides efficient operation
- Available in 15A and 20A versions, all with Fed Spec rating
- TEST and RESET button colors match device face
- Compatible with all Decora® devices and wallplates; available in select Decora colors
- Limited Two-Year Product Warranty

Tamper-Resistant (TR) Models

- Complies with NEC® requirement mandating that all 15A and 20A receptacles installed in dwelling units be listed as tamper-resistant
- Shutter mechanism inside the receptacle blocks access to the contacts unless a two- or three-prong plug is inserted

Duplex Guide Light Models


- Sensor provides automatic ON/OFF based on ambient lighting
- Dual lens provides visible light with a variety of plugs or transformers
- Custom designed lenses with edge-mounted LEDs improve light dispersion
- Energy-efficient (~1W of electricity). No bulbs to replace
- Saves space by eliminating the need to use an outlet for a plug-in night light

Weather-Resistant Models

- Designed for wet and damp locations to meet the requirements of NEC Section 406.8
- Stainless steel strap and screws
- Conformal coated PC board to protect critical components from moisture
- Cold impact resistant face and buttons
- UV stabilized plastics

Audible Models

- Audible alarm sounds when the GFCI trips, providing an alert that power has been disconnected from load(s) plugged into or fed from the GFCI
- Indicator light provides visual status

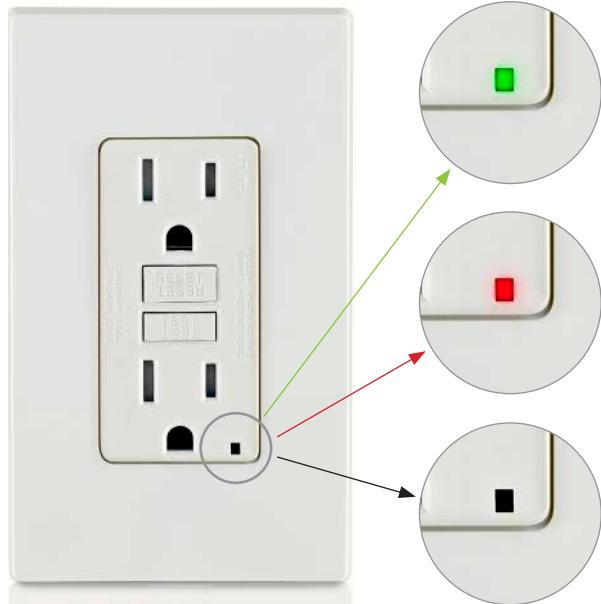

Status Indicator Light

Leviton GFCI devices feature an LED Status Indicator Light which provides a visual indication to the user of the status of GFCI protection. This is a convenient way to check the level of protection at-a-glance.

GREEN LED - NORMAL OPERATION

- GFCI has passed self-test and is providing power

RED LED - ALERT!

- Blinking - Initial self-test upon first power up
- Solid or blinking - Press TEST and RESET buttons to reset GFCI
- If GFCI will not reset OR solid or blinking red continues, replace device

NO LED - NO POWER


- GFCI in tripped state
- Press RESET button
- If GFCI will not reset, no power on the circuit

Agency Standards and Compliance


- Meets the latest UL and CSA requirements
- UL Standard 943 Class A (GFCI) and 498 (Receptacles)
- UL Listed (File #E-48380)
- CSA Standard C22.2 - 144.1 (GFCI) and 42 (Receptacles)
- CSA Certified (File #LR-57811)
- NOM Certified
- Meets Federal Specification W-C-596G (blank face - exception)

Material Characteristics

- Environmental: Flammability UL-94 V2 Rating
- Operating Temperature: -35°C to 66°C
- Material: Face, Thermoplastic; Body, Polycarbonate

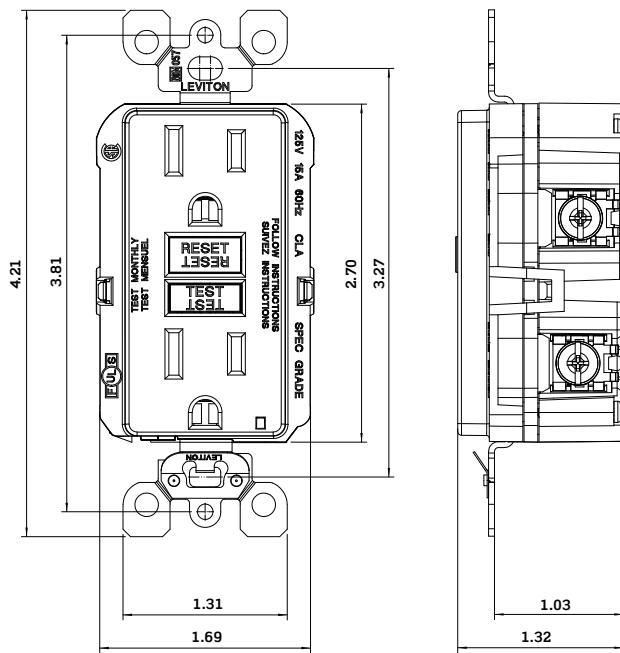

15A SmartlockPro® Self-Test GFCI

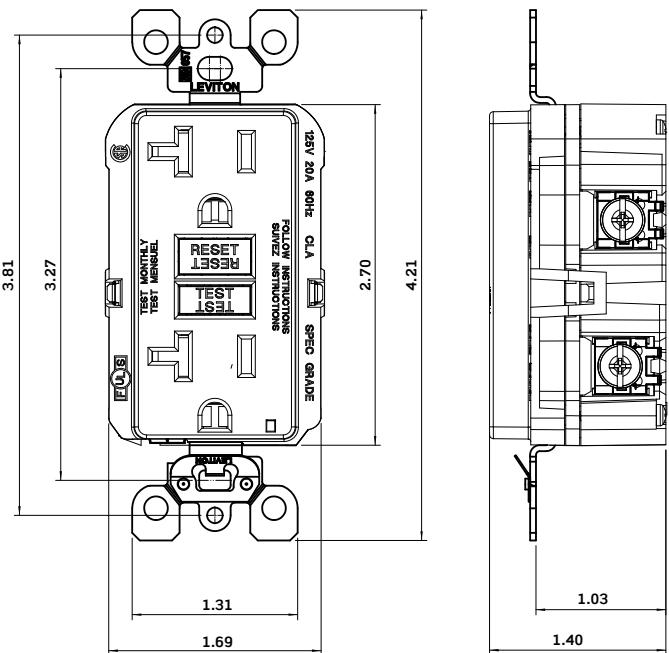

20A SmartlockPro® Self-Test GFCI

Ordering Information

Commercial Spec Grade - Back and Side Wired

| Description | Color | Cat. No. | | Cat. No. | |
|--|--------------|--|----------|--|----------|
| NEMA | | NEMA 5-15R | | NEMA 5-20R | |
| Rating | | 15A-125V @ Receptacle 20A-125V Feed-Through | | 20A-125V @ Receptacle 20A-125V Feed-Through | |
| | | TR | Non-TR | TR | Non-TR |
| Duplex with LED Indicator (with self-grounding clip) | White | GFTR1-W GFTR1-WBK* | GFNT1-W | GFTR2-W GFTR2-WBK* | GFNT2-W |
| | Ivory | GFTR1-I | GFNT1-I | GFTR2-I | GFNT2-I |
| | Light Almond | GFTR1-T | GFNT1-T | GFTR2-T | GFNT2-T |
| | Gray | GFTR1-GY | GFNT1-GY | GFTR2-GY | GFNT2-GY |
| | Black | GFTR1-E | GFNT1-E | GFTR2-E | GFNT2-E |
| | Brown | GFTR1 | GFNT1 | GFTR2 | GFNT2 |
| | Red | - | - | - | GFNT2-R |
| Duplex Weather-Resistant/ Outdoor Grade with LED Indicator | White | GFWT1-W | GFWR1-W | GFWT2-W | GFWR2-W |
| | Ivory | GFWT1-I | GFWR1-I | GFWT2-I | GFWR2-I |
| | Light Almond | GFWT1-T | - | GFWT2-T | - |
| | Gray | GFWT1-GY | - | GFWT2-GY | - |
| | Black | GFWT1-E | GFWR1-E | GFWT2-E | GFWR2-E |
| | Brown | GFWT1 | - | - | - |
| Duplex Guide Light with LED Indicator (with self-grounding clip) | White | GFNL1-W | - | GFNL2-W | - |
| | Ivory | GFNL1-I | - | GFNL2-I | - |
| | Light Almond | GFNL1-T | - | GFNL2-T | - |
| | Black | GFNL1-E | - | - | - |
| Duplex with Audible Trip Alert with LED Indicator (with self-grounding clip) | White | GFTA1-W | - | GFTA2-W | - |
| | Ivory | GFTA1-I | - | GFTA2-I | - |
| | Light Almond | GFTA1-T | - | GFTA2-T | - |
| Combination Switch with LED Indicator (with self-grounding clip) (15 Amp @ 120 VAC Switch rating) | White | GFSW1-W | - | - | - |
| | Ivory | GFSW1-I | - | - | - |
| | Light Almond | GFSW1-T | - | - | - |
| Blank Face with LED Indicator (with self-grounding clip) (20A feedthrough rating only) | White | GFRBF-W | | | |
| | Ivory | GFRBF-I | | | |
| | Light Almond | GFRBF-T | | | |

*20pc bulk pack without wallplates



Leviton Manufacturing Co., Inc.

Tech Line: 1-800-824-3005

Mon-Fri 8am-10pm EST, Saturday 9am-7pm EST, Sunday 9am-5pm EST

For 24/7 product support visit www.leviton.com/support

Visit our Website at: www.leviton.com/gfci

© 2024 Leviton Manufacturing Co., Inc. All rights reserved.

All trademarks are the property of their respective owners.

