


MC[®] 6 UTP Modular Cords - North America

Simon's category 6 series of modular cords are key components to ensure optimum channel performance of our category 6 UTP systems. A variety of product enhancements contribute to the cord's superior performance — including 250 MHz rated stranded cordage, a patented crosspair isolator and an innovative 360° crimp, which provides excellent plug-to-cable strain relief without causing pair deformation.

The cable used to manufacture the category 6 patch cords exceeds the specifications set forth by both ANSI/TIA-568.2-D and ISO/IEC 11801-1 Ed 1.0.

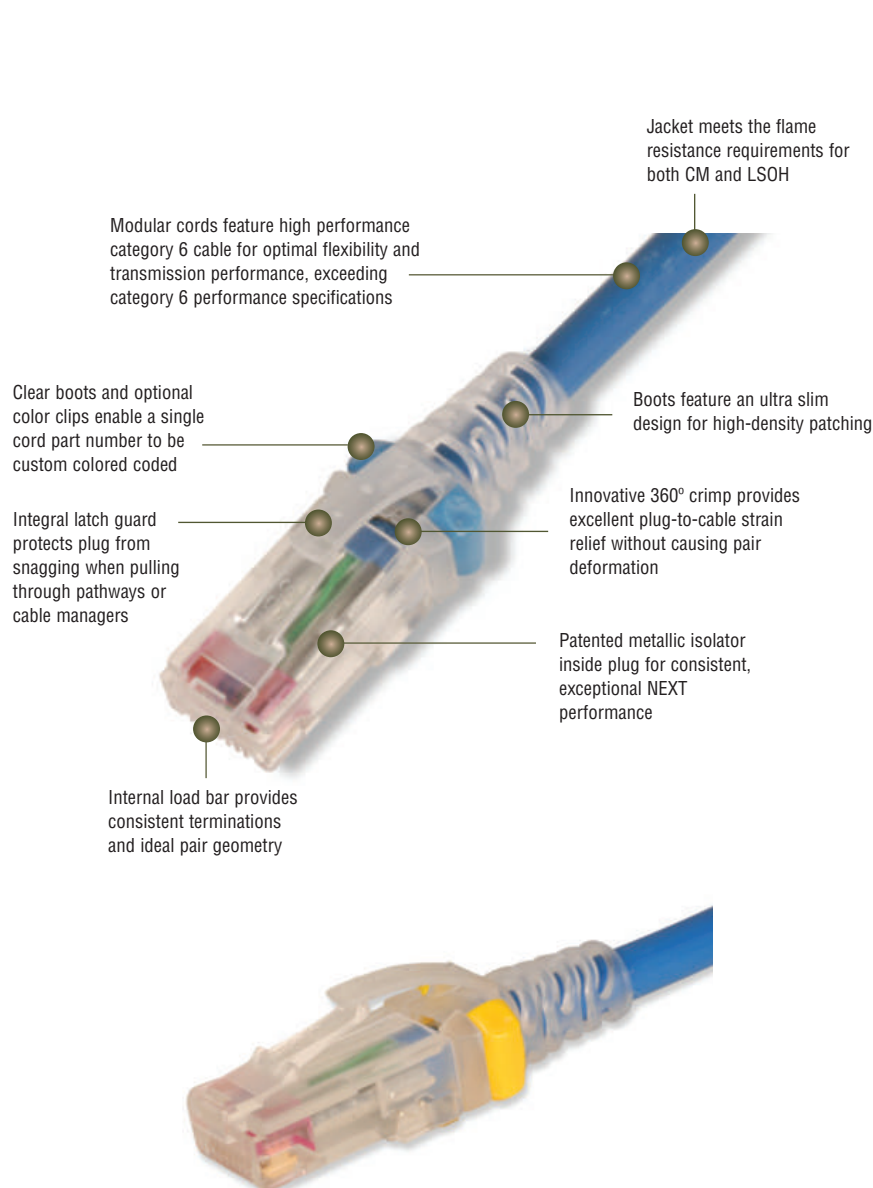

Excellent Bend Relief

Boot and integrated strain relief ensures proper bend relief, critical for category 6 performance



Color Coding

Optional colored clips enable field color coding and can easily be snapped into place without having to disconnect cords

STANDARDS COMPLIANCE

- ANSI/TIA-568.2-D
- ISO/IEC 11801-1 Ed 1.0
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)
- IEC 60603-7
- cUL US Listed
- IEC 60332-1, 60754, 61054, 61034
- TIA-968-A (formerly FCC Part 68 Subpart F)

PRODUCT INFORMATION

Performance Specifications:

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Compatibility	Backwards to cat 5e
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE Type 1,2,3,4 and PoH
MECHANICAL — GENERAL	
Operating Temperature	-10 to 60 °C, (14 to 140 °F)
Flammability Rating	UL 94 - V0
Green Features	RoHS, lead-free, halogen-free, PVC free
Contact Materials	Copper alloy with contact plating of 50 micro inches gold or equivalent
Plastic Materials	Flame retardant thermoplastic
Marking	P/N, length, performance level, QC
MECHANICAL — PLUG	
Number of Plug Insertion Cycles	750
Min. Plug Retention Force	50N
Plug Compatibility	Compatible with RJ45 outlets

MECHANICAL — CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x34 Stranded tinned copper
Cable Construction	UTP
Cable O.D. (nominal)	5.3mm (0.20 in.)
Wiring	T568A/B
Jacket Type	CM/LSOH
Bend Radius	25mm (1.0 in.)

MC 6 UTP Modular Cords

Category 6 MC, double-ended, 4-pair UTP stranded modular patch cord, T568A/B, clear boot.

MC6-(XX)-(XX)	
Cord Length:	Cord Color:
03 = 0.9m (3 ft.)	01 = Black 04 = Gray 07 = Green
05 = 1.5m (5 ft.)	02 = White 05 = Yellow 08 = Violet
07 = 2.1m (7 ft.)	03 = Red 06 = Blue 09 = Orange
10 = 3.1m (10 ft.)	
15 = 4.6m (15 ft.)	
20 = 6.1m (20 ft.)	
CLIP-(XX) Color coding clip, bag of 25	
Clip Color	
01 = Black 04 = Gray 07 = Green	
02 = White 05 = Yellow 08 = Violet	
03 = Red 06 = Blue 09 = Orange	

ⓑ Add “B” for bulk pack of 100 modular cords.



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

For additional resource information:
Visit our web site at www.siemon.com

North America
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165 Canada

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 5385 0303

Latin America
Bogota, Colombia
Phone (571) 657 1950