

# 4-Post Rack

Regional Availability - Global

Siemon's adjustable-depth, 4-Post Rack provides a stable platform for mounting extended depth/size active equipment. It is ideal for use in both Telecommunications Rooms and central patching areas within Data Center environments.

The headers, vertical rails and depth adjustment brackets all feature symmetrical designs to eliminate orientation errors during assembly. They also work in conjunction to self-square the rack during assembly saving valuable installation time. The result is a rack that can be field assembled in less than 20 minutes.



Product Information

Siemon 4-Post Rack System


| Part Number     | Description                                                                      |
|-----------------|----------------------------------------------------------------------------------|
| RSQ1-07-S       | 7 ft. x 19 in. 4-Post Rack, 560-915mm (22-36 in.), Steel, Black, 45U, #12-24     |
| RSQ1-07C-S      | 7 ft. x 19 in. 4-Post Rack, 560-915mm (22-36 in.), Steel, Black, 45U, Cage nuts* |
| CBL-WTF-4PST-01 | 4-Post Rack Cable Waterfall                                                      |
| VPA-PDU-S2-1    | 4-Post Rack side facing PDU bracket – Supports two PDUs side by side             |
| VPA-PDU-F1-1    | 4-Post Rack front facing PDU bracket – Supports one PDU                          |
| RSQ-BAY-VPP     | 4-Post Rack baying bracket for Zero-U Panels, set of 4                           |

\* Includes bag of 50 M6 cage nuts

\*\* Zero-U baying brackets are required to ensure proper operation of Zero-U panels.

Notes:

1. The use of Siemon's RoutelT vertical cable managers is recommended as the rear access functionality of Siemon's vertical patching channels can be compromised when installed between 4-Post Racks.

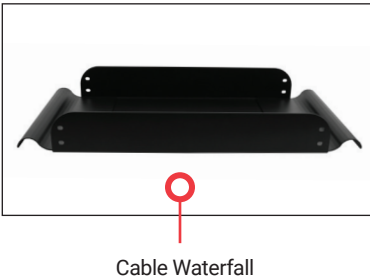

Cable Waterfall



height: 2.13m (7 ft.)  
width: 560mm (22 in.)  
depth: 558 -914mm (22-36 in.)  
1U = 44.5mm (1.75 in.)

4-Post Rack Specifications

|             |                                                    |
|-------------|----------------------------------------------------|
| U Space     | 45U Note: 1U = 44.5mm (1.75 in.)                   |
| Color       | Black                                              |
| Packaging   | Ships flat packed in a single carton               |
| Compliance  | CEA-310-E, UL 60950, IEC 60297-3-100, RoHS         |
| Weight      | 48 kgs (105 lbs), Full weight with packaging       |
| Load Rating | 907 kgs (2000 lbs) Static load, evenly distributed |

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

|                                             |                                                                             |                                                 |                                        |                                     |                                                              |
|---------------------------------------------|-----------------------------------------------------------------------------|-------------------------------------------------|----------------------------------------|-------------------------------------|--------------------------------------------------------------|
| <b>North America</b><br>P: (1) 860 945 4200 | <b>Mexico</b><br>P: (521) 556 387 7708/09/10                                | <b>Latin America</b><br>P: (571) 657 1950/51/52 | <b>Europe</b><br>P: (44) 0 1932 571771 | <b>China</b><br>P: (86) 215385 0303 | <b>India, Middle East &amp; Africa</b><br>P: (971) 4 3689743 |
| <b>Asia Pacific</b><br>P: (61) 2 8977 7500  | <b>Siemon OEM Technologies</b><br>P: (1) 860 945 4213<br>www.siemon.com/OEM |                                                 |                                        |                                     |                                                              |

