
## **RS Rack**

### Regional Availability - Global

Siemon's cable management rack system (RS) combines a 2.1m (7 ft.) x 19 inch black aluminum or steel rack with 1/4-turn cable management accessories to provide a complete management solution. Ideal for all size installations, the rack features fully usable 45U capacity.



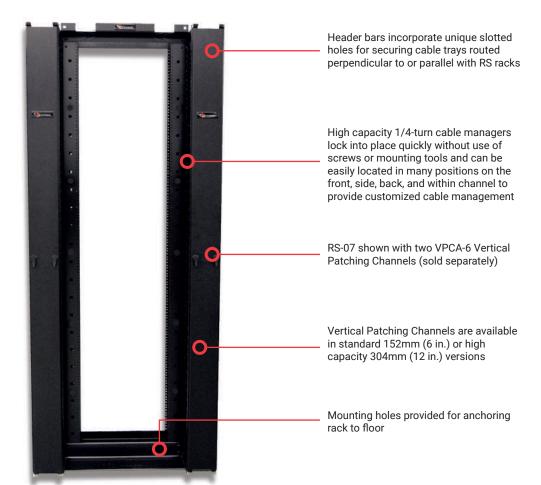

Optional extended depth RS rack for managing extra large volumes of horizontal cable.



76mm (3 in.) x 152mm (6 in.) vertical side rail channels on rack provide large area for routing high volumes of horizontal or backbone cables.



Comprehensive cable management can be created using Siemon's RoutelT Vertical and Horizontal Cable Managers.



Optional vertical cable management channels allow a high volume of patch cords to be routed between two racks or within a single rack.



### **Product Information**

# **Siemon Rack System**

#### **Part Number Description**

**RS-07** 7 ft. x 19 inch (2.1m x 482mm) aluminum cable management rack system. Includes rack assembly hardware, 10 high-capacity cable managers, 10 hook and loop cable managers, and ground lug

Add "-S" for Steel

Add "E" for Extended Depth [0.37m (14.5 in). rails] aluminum rack\*

- 1. Aluminum racks are intended for use with connecting hardware and cable managers only. For mounting of active equipment, steel racks are recommended.
- 2. Single-sided vertical cable managers are recommended for use with extended depth racks as the rear access functionality of double-sided vertical cable managers is compromised.
- 3. RS-07 series racks are not compatible with Siemon's Value Vertical Cable Managers



### **Rack Accessories**

#### **Part Number Description**

RS-CH	High-capacity cable managers for front of rack
RS-VCM	Box of 10 quarter-turn hook and loop cable managers. Includes black 457.2mm (18 in.) managers



# **RS Series Rack Specifications**

Part Number	Description	
U Space	45U Note: 1U = 44.5mm (1.75 in.)	
Height	2.1m (7ft)	
Width	609.6mm (24 in.)	
Depth	RS-07(-S): 457.2mm (18 in.) RS-07E: 584.2mm (23.0 in.)	
Color	Black	
Packaging	Ships unassembled in a carton	
Standards Compliance	CEA-310-E, UL 1863, RoHS	
Weight (With packaging for RS-07-(x)	Aluminum: 20 kg (47 lbs) Steel: 34 kg (75 lbs)	
Load Rating	Aluminum: 227 kg (500 lbs) Steel: 454 kg (1000 lbs)	

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**North America** 

P: (521) 556 387 7708/09/10 P: (1) 860 945 4200

P: (571) 657 1950/51/52

Latin America

P: (44) 0 1932 571771

China P: (86) 215385 0303 India, Middle East & Africa P: (971) 4 3689743

Asia Pacific P: (61) 2 8977 7500

**Siemon OEM Technologies** P: (1) 860 945 4213 www.siemon.com/0EM

